

U. S. SURVEY
No. 3272, ALASKA

SITUATED
ON THE SOUTHWEST SHORE GASTINEAU CHANNEL,
DOUGLAS ISLAND,
ABOUT 3/4 MILES NORTHWEST OF THE WEST END OF
THE JUNEAU-DOUGLAS BRIDGE

AREA: 47.23 ACRES


Latitude 58° 20' 14.615" N.-Longitude 134° 30' 40.855" W.
AT MEANDEK CORNER NO. 4

SURVEYED BY
Jack C. Means, Cartographer (Cadastral)
July 28 to August 18, 1953
Under Special Instructions Dated
December 5, 1952 and Approved
December 16, 1952


UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Washington, D. C. May 14, 1954

This plat is strictly conformable to the
approved field notes, and the survey, having
been correctly executed in accordance with the
requirements of law and the regulations of this
Bureau, is hereby accepted.

For the Director
Donald O. Clement
Assistant Chief, Division of
Cadastral Engineering

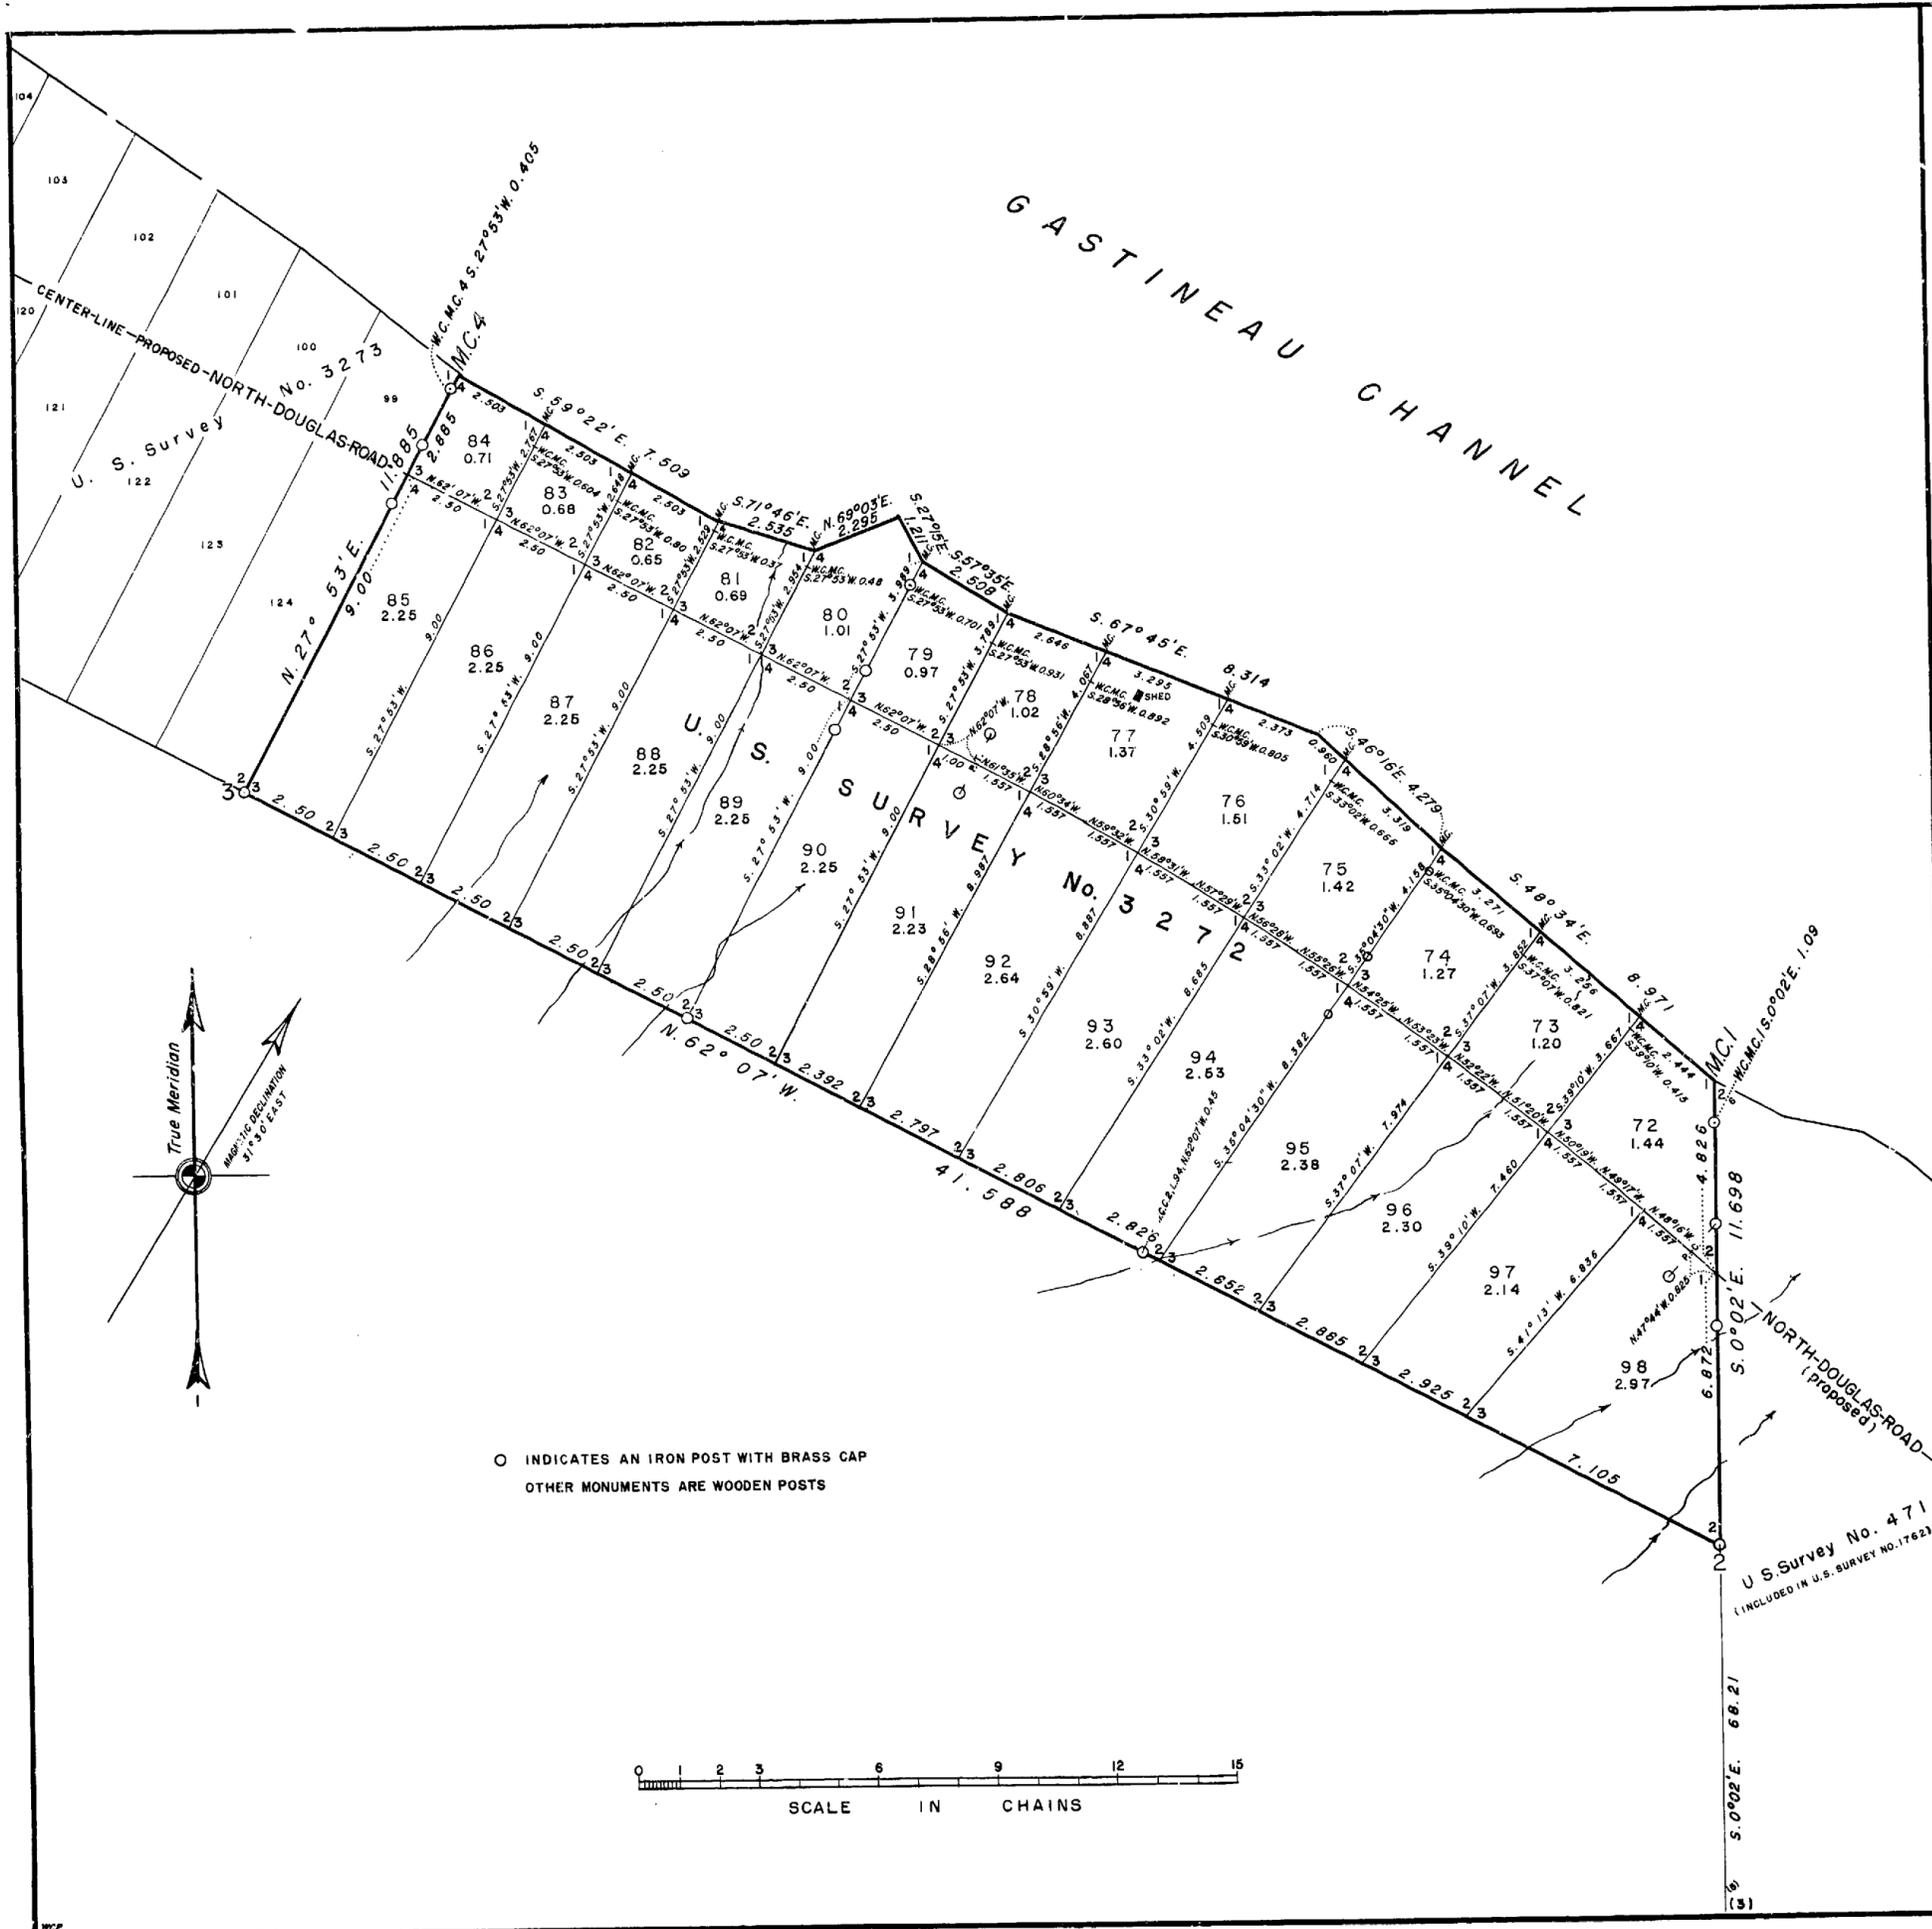

○ INDICATES AN IRON POST WITH BRASS CAP
OTHER MONUMENTS ARE WOODEN POSTS



ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED
JUNEAU, ALASKA
MAY 20 1954
BUREAU OF LAND
MANAGEMENT
OFFICE

FIELD NOTES

288

OF

U. S. SURVEY NO. 3272

SITUATED

ON THE SOUTHWEST SHORE GASTINEAU CHANNEL, DOUGLAS ISLAND

ABOUT 3 1/4 MILES NORTHWEST OF THE WEST END OF THE

JUNEAU-DOUGLAS BRIDGE

IN

Latitude 58° 20' 14.615" N.

Longitude 134° 30' 40.855" W.

AT MEANDER CORNER NO. 4

Of the Meridian,

In the ~~State of~~ TERRITORY OF ALASKA

EXECUTED BY

JACK C. MEANS, CARTOGRAPHER (CADASTRAL)

Under special instructions dated December 5, 1952, which provided

for the surveys included under ~~Group~~ U. S. Survey No. 3272, approved December 16, 1952

and assignment instructions dated July 1, 1953

Survey commenced July 28, 1953

Survey completed August 18, 1953

- 1 -

U. S. SURVEY NO. 3272

Chains

Survey commenced July 28, 1953. In execution of this survey, I use the same transit, tape and azimuth determination as described in the field notes of U. S. Survey No. 3171.

The geographical position of meander Cor. No. 4, is latitude $58^{\circ} 20' 14.615''$ N., longitude $134^{\circ} 30' 40.855''$ W. as based upon U. S. Coast and Geodetic Survey triangulation station "Salmon", North American datum, 1927.

Magnetic declination is $31^{\circ} 30'$ E.

The description of the corners and topography of lot boundaries are given in the field notes of the exterior boundaries of the survey, when such boundary is identical to the lot boundaries.

Begin at point for meander Cor. No. 1, and meander Cor. No. 1, Lot 72, identical with meander Cor. No. 2, U. S. Survey No. 471 and meander Cor. No. 6, U. S. Survey No. 1762, at line of mean high tide, southwest shore Gastineau Channel. Impracticable to monument due to liability to destruction by tidal action.

S. $00^{\circ} 02'$ E.

On line 1-2 and line 1-2, Lots 72 and 98, identical with a portion of line 2-3, U. S. Survey No. 471 and a portion of line 6-5, U. S. Survey No. 1762, ascending 92 ft. over rolling NE. slope through timber and undergrowth.

1.09

Point for witness meander Cor. No. 1 and witness meander Cor. No. 1, Lot 72, identical with witness meander Cor. No. 2, U. S. Survey No. 471 and witness meander Cor. No. 6, U. S. Survey No. 1762, which is monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of U. S. Survey No. 1762.

I mark the west side brass cap.

S 3272
C 1
L 72
C 1

from which (new bearing trees)

A spruce, 6 ins. diam., bears S. $67^{\circ} 15'$ W., 0.25 chs. dist., mkd. X at breast height and BT at crown root.

A hemlock, 6 ins. diam., bears N. $51^{\circ} 15'$ W., 0.27 chs. dist., mkd. X at breast height and BT at crown root.

3.60

Reference monument, hereinafter described.

4.826

Intersect centerline, proposed North Douglas Road, bears S. $47^{\circ} 44'$ E. and N. $47^{\circ} 44'$ W., point for Cor. No. 2, Lot 72, identical with Cor. No. 1, Lot 98.

Set a wood stake, $2\frac{1}{2} \times 1\frac{1}{2}$ ins., 12 ins. in the ground.

from which

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground for reference monument, with brass cap mkd. S 471 S 1762 on E. side, S 3272 RM 1953 on W. side and an arrow pointing to the true corner, bears N. $00^{\circ} 02'$ W., 1.226 chs. dist.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground for reference monument, with brass cap mkd. S 471 S 1762 on E. side, S 3272 RM L98 1953 on W. side and an arrow pointing to the true corner, bears S. $00^{\circ} 02'$ E., 1.226 chs. dist.

U. S. SURVEY NO. 3272

Chains

A hemlock, 12 ins. diam., bears S. 2° 15' W., 1.405 chs. dist., mkd.
S 3272 L98 BT.

A hemlock, 8 ins. diam., bears S. 8° W., 1.20 chs. dist., mkd.
S 3272 L98 BT.

A hemlock, 8 ins. diam., bears N. 21° 30' W., 1.21 chs. dist., mkd.
S 3272 L72 BT.

A hemlock, 10 ins. diam., bears N. 15° 45' W., 1.67 chs. dist., mkd.
S 3272 L72 BT.


6.052 Reference monument, hereinbefore described.

6.41 Stream, 0.01 ch. wide, course NE.

9.82 Stream, 0.01 ch. wide, course NE.

11.698 Point for Cor. No. 2, identical with Cor. No. 2, Lot 98.

Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground,
with brass cap mkd.

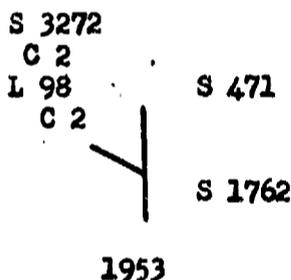

from which

Cor. No. 3, U. S. Survey No. 471, identical with Cor. No. 5,
U. S. Survey No. 1762 and Cor. No. 10, U. S. Survey No. 2393,
which is monumented with an iron post, 2 ins. diam., set, mkd.
and witnessed as described in the official record of U. S.
Survey No. 1762, bears S. 00° 02' E., 68.21 chs. dist.

A spruce, 6 ins. diam., bears N. 56° 45' W., 0.65 chs. dist., mkd.
S 3272 C2 L98 BT.

A hemlock, 12 ins. diam., bears N. 13° W., 0.49 chs. dist., mkd.
S 3272 C2 L98 BT.

Record bearing and distance line 2-3, U. S. Survey No. 471, SOUTH
79.55 chs.

N. 62° 07' W.

On line 2-3, identical with line 2-3, Lots 98 to 35 inclusive,
ascending 18 ft. along NE. slope through timber and undergrowth.

1.38 Stream, 0.01 ch. wide, course NE.

5.93 Stream, 0.01 ch. wide, course NE.

7.105 Point for Cor. No. 3, Lot 98, identical with Cor. No. 2, Lot 97.

Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed
S 3272 on N., LOT 98 on E. and LOT 97 on NW. side.

10.03 Point for Cor. No. 3, Lot 97, identical with Cor. No. 2, Lot 96.

Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed
S 3272 on N., LOT 97 on E. and LOT 96 on NW. side.

U. S. SURVEY NO. 3272

- Chains
12.915 Point for Cor. No. 3, Lot 96, identical with Cor. No. 2, Lot 95.
Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 96 on E. and LOT 95 on NW. side.
- 15.767 Point for Cor. No. 3, Lot 95, identical with Cor. No. 2, Lot 94, falls in stream, 0.02 chs. wide, course E. Impracticable to monument.
- 16.217 Point on suitable ground for witness Cor. No. 3, Lot 95, identical with witness Cor. No. 2, Lot 94.
Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.

W C

S 3272

L 94

C 2

L 95

C 3

1953

from which

A hemlock, 4 ins. diam., bears N. 37°30' E., 0.30 chs. dist., mkd. X at breast height and BT at crown root.

A hemlock, 8 ins. diam., bears N. 37°15' W., 0.19 chs. dist., mkd. X at breast height and BT at crown root.

- 18.593 Point for Cor. No. 3, Lot 94, identical with Cor. No. 2, Lot 93.
Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 94 on E. and LOT 93 on NW. side.
- 21.399 Point for Cor. No. 3, Lot 93, identical with Cor. No. 2, Lot 92.
Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 93 on E. and LOT 92 on NW. side.
- 24.196 Point for Cor. No. 3, Lot 92, identical with Cor. No. 2, Lot 91.
Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 92 on E. and LOT 91 on NW. side.
- 26.588 Point for Cor. No. 3, Lot 91, identical with Cor. No. 2, Lot 90.
Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 91 on E. and LOT 90 on NW. side.
- 29.088 Point for Cor. No. 3, Lot 90, identical with Cor. No. 2, Lot 89.
Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.

S 3272

L 89

C 2

L 90

C 3

1953

from which

U. S. SURVEY NO. 3272

Chains	
	A spruce, 14 ins. diam., bears N. 82°15' E., 0.49 chs. dist., mkd. S 3272 L90 BT.
	A hemlock, 6 ins. diam., bears N. 34° W., 0.445 chs. dist., mkd. S 3272 L89 BT.
29.69	Stream, 0.01 ch. wide, course NNE.
31.588	Point for Cor. No. 3, Lot 89, identical with Cor. No. 2, Lot 88. Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 89 on E. and LOT 88 on NW. side.
31.99	Stream, 0.01 ch. wide, course NE.
34.088	Point for Cor. No. 3, Lot 88, identical with Cor. No. 2, Lot 87. Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 88 on E. and LOT 87 on NW. side.
35.44	Stream, 0.01 ch. wide, course NE.
36.588	Point for Cor. No. 3, Lot 87, identical with Cor. No. 2, Lot 86 Set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed S 3272 on N., LOT 87 on E. and LOT 86 on NW. side.
39.088	Point for Cor. No. 3, Lot 86, identical with Cor. No. 2, Lot 85 falls on a hemlock stump 18 ins. diam. At the corner point, Set a nail 4 ins. long and scribe the stump S 3272 on N., LOT 86 on E. and LOT 85 on NW. side.
41.588	Point for Cor. No. 3 and Cor. No. 3, Lot 85, identical with Cor. No. 2, U. S. Survey No. 3273 and Cor. No. 2, Lot 124, U. S. Survey No. 3273, subsequently surveyed. Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd. <div style="text-align: center; margin-left: 100px;"> <p>S 3273 C 2 L 124 C 2</p> <p>S 3272 C 3 L 85 C 3</p> <p>1953</p> </div>
	from which A hemlock, 12 ins. diam., bears N. 55° E., 0.42 chs. dist., mkd. S 3272 C3 L85 BT. A spruce, 8 ins. diam., bears S. 40°15' E., 0.315 chs. dist., mkd. S 3272 C3 BT. A hemlock, 4 ins. diam., bears N. 59° W., 0.25 chs. dist., mkd. S 3273 C2 L124 BT. A spruce, 18 ins. diam., bears N. 00°30' W., 0.52 chs. dist., mkd. S 3273 C2 L124 BT.
	N. 27° 53' E.

U. S. SURVEY NO. 3272

Chains

On line 3-4 and line 3-4, Lots 85 and 84, identical with line 2-1, Lots 124 and 99, and line 2-1, U. S. Survey No. 3273. Descend 110 ft. over rolling NE. slope through timber and undergrowth.

8.15 Reference monument, hereinafter described.

9.00 Intersect center line of proposed North Douglas Road, bears S. $62^{\circ}07'$ E. and N. $62^{\circ}07'$ W. Point for Cor. No. 4, Lot 85 and Cor. No. 3, Lot 84, identical with Cor. No. 1, Lot 124 and Cor. No. 2, Lot 99, U. S. Survey No. 3273.

Set a wood stake, 2x2x18 ins., 12 ins. in the ground.

from which

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground for reference monument with brass cap mkd. S 3272 RM L84 1953 on E. side, S 3273 L99 on W. side and an arrow pointing to the true corner, bears N. $27^{\circ}53'$ E., 0.85 chs. dist.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground for reference monument with brass cap mkd. S 3272 RM L85 1953 on E. side, S 3273 L124 on W. side and an arrow pointing to true corner, bears S. $27^{\circ}53'$ W., 0.85 chs. dist.

A spruce, 10 ins. diam., bears N. $11^{\circ}30'$ E., 1.075 chs. dist., mkd. S 3273 L99 BT.

A spruce, 5 ins. diam., bears N. $36^{\circ}30'$ E., 1.01 chs. dist., mkd. S 3272 L84 BT.

A spruce, 10 ins. diam., bears S. $25^{\circ}15'$ W., 1.035 chs. dist., mkd. S 3272 L85 BT.

A hemlock, 10 ins. diam., bears S. 37° W., 1.155 chs. dist., mkd. S 3273 L124 BT.

9.85 Reference monument, hereinbefore described.

11.48 Point on suitable ground for witness meander Cor. No. 4 and witness meander Cor. No. 4, Lot 84, identical with witness meander Cor. No. 1, U. S. Survey No. 3273 and witness meander Cor. No. 1, Lot 99, U. S. Survey No. 3273, subsequently surveyed.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 27 ins. in the ground, with brass cap mkd.

S 3273
C 1
L 99
C 1

M C

W C

S 3272
C 4
L 84
C 4

1953

from which

A hemlock, 4 ins. diam., bears S. $23^{\circ}15'$ E., 0.225 chs. dist., mkd. X at breast height and BT at crown root.

A spruce, 6 ins. diam., bears S. $69^{\circ}30'$ W., 0.215 chs. dist., mkd. X at breast height and BT at crown root.

U. S. SURVEY NO. 3272

Chains
11.885

Point for meander Cor. No. 4, and meander Cor. No. 4, Lot 84, identical with meander Cor. No. 1, U. S. Survey No. 3273 and meander Cor. No. 1, Lot 99, U. S. Survey No. 3273, at line of mean high tide, southwest shore Gastineau Channel, Impracticable to monument due to liability to destruction of monument by tidal action.

Thence with meanders, southwest shore Gastineau Channel at line of mean high tide.

S. 59° 22' E., 7.509 chs. At 2.503 chs., point for meander Cor. No. 1, Lot 84, identical with meander Cor. No. 4, Lot 83, Impracticable to monument.

At a point S. 27° 53' W., 0.604 chs. dist., on line bet. lots 83 and 84 on suitable ground for witness meander Cor. No. 1, Lot 84, identical with witness meander Cor. No. 4, Lot 83, set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 83 on E., S3272 on SW. and LOT 84 on W. side.

At 5.006 chs., point for meander Cor. No. 1, Lot 83, identical with meander Cor. No. 4, Lot 82. Impracticable to monument.

At a point S. 27° 53' W., 0.80 chs., on line bet. lots 82 and 83, on suitable ground for witness meander Cor. No. 1, Lot 83, identical with witness meander Cor. No. 4, Lot 82, set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 82 on E., S3272 on SW. and LOT 83 on W. side.

At 7.509 chs., end of course and point for meander Cor. No. 1, Lot 82, identical with meander Cor. No. 4, Lot 81. Impracticable to monument.

At a point, S. 27° 53' W., 0.37 chs. dist., on line bet. lots 81 and 82, on suitable ground for witness meander Cor. No. 1, Lot 82, identical with witness meander Cor. No. 4, Lot 81, set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 81 on E., S 3272 on SW. and LOT 82 on W. side.

S. 71° 46' E., 2.535 chs. At 1.81 chs., stream, 0.01 chs. wide, course from SW.

At 2.535 chs., end of course and point for meander Cor. No. 1, Lot 81, identical with meander Cor. No. 4, Lot 80, Impracticable to monument.

At a point, S. 27° 53' W., 0.48 chs. dist., on line bet. lots 80 and 81, on suitable ground for witness meander Cor. No. 1, Lot 81, identical with witness meander Cor. No. 4, Lot 80, set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 80 on E., S 3272 on SW. and LOT 81 on W. side.


N. 69° 03' E., 2.295 chs.

U. S. SURVEY NO. 3272

Chains

S. 27° 15' E., 1.211 chs. To point for meander Cor. No. 1, Lot 80, identical with meander Cor. No. 4, Lot 79. Impracticable to monument.

At a point, S. 27°53' W., 0.701 chs. dist. on line bet. lots 79 and 80 on suitable ground for witness meander Cor. No. 1, Lot 80, identical with witness meander Cor. No. 4, Lot 79, set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground with brass cap mkd.

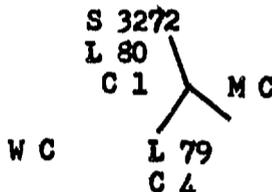

1953

from which

A spruce, 12 ins. diam., bears N.79° 40' E., 0.055 chs. dist., mkd. X at breast height and BT at crown root.

A hemlock, 8 ins. diaa., bears S.52° 40' W., 0.16 chs. dist., mkd. X at breast height and BT at crown root.

S. 57° 35' E., 2.508 chs. To point for meander Cor. No. 1, Lot 79, identical with meander Cor. No. 4, Lot 78. Impracticable to monument.

At a point S. 27°53' W., 0.931 chs. dist. on line bet. lots 78 and 79 on suitable ground for witness meander Cor. No. 1, Lot 79, identical with witness meander Cor. No. 4, Lot 78, set a wood post 3x3x36 ins., 20 ins. in the ground scribed WCMC on NE., LOT 78 on E., S 3272 on SW. and LOT 79 on W. side.

S. 67° 45' E., 8.314 chs. At 2.646 chs. point for meander Cor. No. 1, Lot 78, identical with meander Cor. No. 4, Lot 77. Impracticable to monument.

from which

The most northerly cor. of a shed, 9x17 ft. long side extends S. 29° W., bears S. 39°49' E., 1.30 chs. dist.

At a point, S. 28°56' W., 0.892 chs. dist., on line bet. lots 77 and 78, on suitable ground for witness meander Cor. No. 1, Lot 78, identical with witness meander Cor. No. 4, Lot 77, set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 77 on E., S 3272 on SW. and LOT 78 on W. side.

At 5.941 chs., point for meander Cor. No. 1, Lot 77, identical with meander Cor. No. 4, Lot 76. Impracticable to monument.

At a point S. 30°59' W., 0.805 chs. dist.,

U. S. SURVEY NO. 3272

Chains

on line bet. lots 76 and 77, on suitable ground for witness meander Cor. No. 1, Lot 77, identical with witness meander Cor. No. 4, Lot 76, set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 76 on E., S 3272 on SW. and LOT 77 on W. side.

At 8.314 chs., end of course.


S. 46° 16' E., 4.279 chs.

At 0.96 chs., point for meander Cor. No. 1, Lot 76, identical with meander Cor. No. 4, Lot 75. Impracticable to monument.

At a point, S. 33°02' W., 0.666 chs. dist. on line bet. lots 75 and 76, on suitable ground for witness meander Cor. No. 1, Lot 76, identical with witness meander Cor. No. 4, Lot 75, set a wood post 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 75 on E., S3272 on SW. and LOT 76 on W. side.

At 4.279 chs., end of course and point for meander Cor. No. 1, Lot 75, identical with meander Cor. No. 4, Lot 74. Impracticable to monument.

At a point S. 35°04'30" W., 0.693 chs. dist., on line bet. lots 74 and 75, on suitable ground for witness meander Cor. No. 1, Lot 75, identical with witness meander Cor. No. 4, Lot 74, set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.

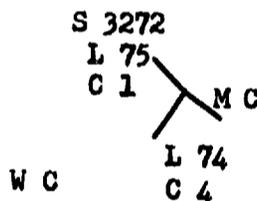

1953

from which

A spruce, 3 ins. diam., bears S.15°E., 0.29 chs. dist., mkd. X at breast height and BT at crown root.

A spruce, 4 ins. diam., bears N.52°15' W., 0.47 chs. dist., mkd. X at breast height and BT at crown root.

S. 48° 34' E., 8.971 chs.

At 3.271 chs., point for meander Cor. No. 1, Lot 74, identical with meander Cor. No. 4, Lot 73. Impracticable to monument.

At a point, S. 37°07' W., 0.821 chs. dist. on line bet. lots 73 and 74, on suitable ground for witness meander Cor. No. 1, Lot 74, identical with witness meander Cor. No. 4, Lot 73, set a wood post, 3x3x36 ins., 20 ins. in the ground, scribed WCMC on NE., LOT 73 on E., S3272 on SW. and LOT 74 on W. side.

U. S. SURVEY NO. 3272

Chains

At 4.82 chs., stream, 0.01 ch. wide, course from SW.

At 6.527 chs., point for meander Cor. No. 1, Lot 73, identical with meander Cor. No. 4, Lot 72. Impracticable to monument.

At a point S. $39^{\circ}10'$ W., 0.415 chs. dist., on line bet. lots 72 and 73, on suitable ground for witness meander Cor. No. 1, Lot 73, identical with witness meander Cor. No. 4, Lot 72, set a wood post, $3 \times 3 \times 36$ ins., 20 ins. in the ground, scribed WCMC on NE., LOT 72 on E., S 3272 on SW. and LOT 73 on W. side.

At 8.971 chs., end of course and meander Cor. No. 1, place of beginning, containing 47.23 acres.

GENERAL DESCRIPTION

This survey is located on the southwest shore Gastineau Channel, about $3\frac{1}{2}$ miles northwest of the west end of the Juneau-Douglas Bridge and is subdivided into 27 lots, numbered 72 to 98 inclusive. No lot was occupied at time of survey. The entire area is on a rolling broken northeasterly slope, cut by numerous small ravines and streams. The road right-of-way has been cleared of all vegetation; the remaining area of the survey is covered with spruce and hemlock timber, blueberry, devils club and alder undergrowth. The soil is light, being composed of forest mould over rock, gravel and clay.

This survey adjoins U. S. Surveys Nos. 471 and 3273.

SUBDIVISION OF U. S. SURVEY NO. 3272

The lot lines, bearings and distances are delineated upon the plat of the survey and are therefore not given within this field note record. The traverse of the center line of the proposed North Douglas Road, as delineated upon the plat, determines the southwesterly boundary of lots 72 to 84 inclusive and the northeasterly boundary of lots 85 to 98 inclusive.

The beginning and end of a 1° left curve, delta angle of $14^{\circ}23'$, located within the survey are monumented as follows:

At the beginning of the curve,

Set a wood stake, $2 \times 2 \times 18$ ins., 12 ins. in the ground, scribed PC on the N., and S 3272 on the S. side.

from which

Reference monument for Cor. No. 2, Lot 72, bears N. $42^{\circ}16'$ E., 0.907 chs. dist.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground, for a reference monument with brass cap mkd. PC S 3272 1953, bears S. $42^{\circ}16'$ W., 0.80 chs. dist.

At the end of the curve,

Set a wood stake $2 \times 2 \times 18$ ins., 12 ins. in the ground, scribed PT on N. side and S 3272 on S. side.

U. S. SURVEY NO. 3272

Chains

from which

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground for a reference monument, with brass cap mkd. S3272 PT 1953, bears N. $27^{\circ}53'$ E., 0.85 chs. dist.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground for a reference monument, with brass cap mkd. S 3272 PT 1953, bears S. $27^{\circ}53'$ W., 0.85 chs. dist.

All lot corners in the interior of the survey, except those hereinafter described, are monumented with wood stakes, 2x2x18 ins., set 12 ins. in the ground and are referenced with two wood posts, 3x3x36 ins., appropriately marked and set 20 ins. in the ground in a northeasterly and southwesterly direction on line bet. lots, 0.85 chs. from the true corner points.

Cor. No. 3, Lot 74, identical with Cor. No. 2, Lot 75; Cor. No. 1, Lot 94 and Cor. No. 4, Lot 95.

Set a wood stake, 2x2x18 ins., 12 ins. in the ground.

from which

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground on line bet. lots 74 and 75 with brass cap mkd. RM L74 1953 on E., S 3272 L75 on W. side, and an arrow pointing to the true corner point, bears N. $35^{\circ}04'30''$ E., 0.85 chs. dist.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground on line bet. lots 94 and 95, with brass cap mkd RM L95 1953 on E., S 3272 L94 on W. side and an arrow pointing to the true corner point, bears S. $35^{\circ}04'30''$ W., 0.85 chs. dist.

Cor. No. 3, Lot 79, identical with Cor. No. 2, Lot 80; Cor. No. 1, Lot 89 and Cor. No. 4, Lot 90.

Set a wood stake, 2x2x18 ins., 12 ins. in the ground.

from which

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground on line bet. lots 79 and 80 with brass cap mkd. RM L79 1953 on E., S 3272 L80 on W. side and an arrow pointing to the true corner point, bears N. $27^{\circ}53'$ E., 0.85 chs. dist.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 27 ins. in the ground on line bet. lots 89 and 90 with brass cap mkd. RM L90 1953 on E., S 3272 L89 on W. side and an arrow pointing to the true corner point, bears S. $27^{\circ}53'$ W., 0.85 chs. dist.

CERTIFICATE OF CADASTRAL ENGINEER

I, Jack C. Means, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 5th day of December, 1952 I have surveyed U. S. Survey No. 3272, situated on the Southwest shore Gastineau Channel, Douglas Island about 3 1/4 miles Northwest of the West end of the Juneau-Douglas bridge.

of the Meridian, in the ~~State of~~ Territory of Alaska, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Juneau, Alaska
February 9, 1954

Jack C. Means
Cartographer (Cadastral)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,

Washington, D. C., MAY 14 1954, 1954

The foregoing field notes of the survey of U. S. Survey No. 3272, situated on the Southwest shore Gastineau Channel, Douglas Island about 3 1/4 miles Northwest of the West end of the Juneau--Douglas bridge.

executed by Jack C. Means, Cartographer (Cadastral)

having been critically examined and found correct, are hereby approved.

Assistant Chief, Division of Cadastral Engineering.

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in Alaska, is a true copy of the original field notes.

Chief, Division of Cadastral Engineering.